

LTD2316SS-B 16 CH Realtime with HDMI Advanced Performance DVR

Features


- Real-Time High Resolution Recording
- H.264 Compression Technology
- Intuitive Graphic User Interface
- Quick Search, Easy Backup
- Remote Monitoring / Control via CMS or Web Browsers
- Multi-User management
- Live View on Smart Phones and Playback on iPhones
- 2 Year Warranty & Free Life-Time Technical Support



Specifications

System	Compression Format	H.264
	OS	Embedded Linux
Video	Input	16 CH, BNC (1.0Vp-p, 75Ω)
	VGA Output	1*VGA:1280x1024, 800x600, 1024x768
	BNC	1*BNC Mainout
	Loop Output	No
	Spot Output	1*Spot
	HDMI	Compatible with HDMI 1920x1080 output, progressive scan, 60Hz frame rate.
Audio	Audio Input	2
	Audio Output	1
	Bidirectional Talk	YES
Recording	Real Time Recording	16CH CIF
	D1	7.5 FPS/CH
	CIF	30 FPS/CH
	Recording Mode	Schedule, Manual, Motion Detection
Playback	Playback Channel	16
	Search Mode	Time/calendar search, event search(motion, external alarm event)
Backup	USB Disk	1 USB2.0 port for portable HDD, DVD-RW
	DVD Burner	-
	Backup Format	DAT or AVI
Dual Stream	Master Stream	30(NTSC)/25(PAL)fps CIF per CH
	Network Stream	1/2 fps CIF per CH
Remote Application	Browser	IE, Safari, Chrome, Firefox
	CMS	YES
	Mobile Phone OS	BroView for iPhone/iPad/Android
Alarm	Alarm Input	-
	Alarm Output	-
Storage	HDD (Each max size 3 TB)	1
	e-SATA	NO
	Max HDD after Deploying	-
	DVD Writable Driver	-
PTZ	PTZ	1*RS485
	PTZ Protocol	PELCOP, PELCOD, LILIN, MINKING, NEON, STAR, VIDO, DSCP, VISCA, SAMSUNG, RM110, HY
	PTZ Control	pan, tilt, zoom, preset, cruise, trace
Network	Ethernet Protocol	1,000 Mbps Ethernet (RJ-45)
	Protocol	TCP/IP, DHCP, DDNS, NTP, SMTP
Others	Remote Control	1
	Power Supply	DC12V/2A
	Operating Temperature	0°C ~50°C
	Humidity	10% ~ 90% Humidity
Dimension	11.75"(L)×10"(W)×2.25"(H)	

Front/Back View

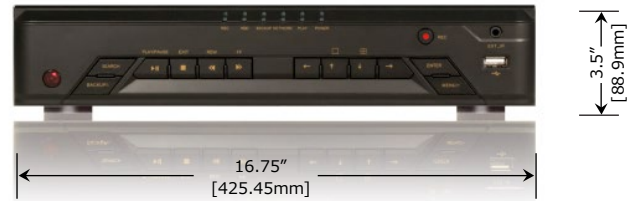

1 SATA 2U Case
(Hard Drive Sold Separately)